

LS-248H II Lift Crane Capacities

PCSA Class 12-1080
Refer to notes page 11

Boom - Tube: 80" (2.03 m) wide, 68" (1.73m) deep with open throat top section. Hammerhead top section required for max. pick.

Jib - Tube: 32" (.81 m) wide, 24" (.61m) deep.

Counterweights - Refer to chart below.

Mounting - crawler:
overall length: 28' 6" (8.69 m)
gauge: 18' 10" (5.74 m)

Counterweights							
"A" Upper		"AB" Upper		"ABC" Upper		"A" Auxillary Lower	
Pounds	Kilograms	Pounds	Kilograms	Pounds	Kilograms	Pounds	Kilograms
22,730	10 310	67,470	30 604	96,430	43 741	48,000	21 773

Open throat boom or boom + jib machine can **lift off** ground unassisted, without load.

Counterweight		Over End Only			
		Boom		Boom + Jib	
		Feet	meters	Feet	meters
No Cwt.	Maximum	150	45.72	n/a	n/a
Cwt. "A"	Maximum	180	54.86	n/a	n/a
Cwt. "AB"	Maximum	240	73.15	n/a	n/a
Cwt. "ABC"	Maximum	270	82.30	n/a	n/a
Cwt. "ABC" + "A"	Maximum	280	85.34	240 + 100	73.15 + 30.48

Gibbons Erectors, Inc.
8019 Towhee Road
Parker, CO 80134


Notes:

- Booms must be erected or lowered over the end with no load.
- Crane on firm and level surface.
- Booms \geq 250 ft. (76.20 m) and longer require midpoint suspension pendants.

Working Areas

Note: These lines determine the limiting position of any load for operation within working areas indicated.

Caution: This material is for reference only. Operator must refer to the Crane Rating Manual to determine allowable machine lifting capacities and operating procedures.

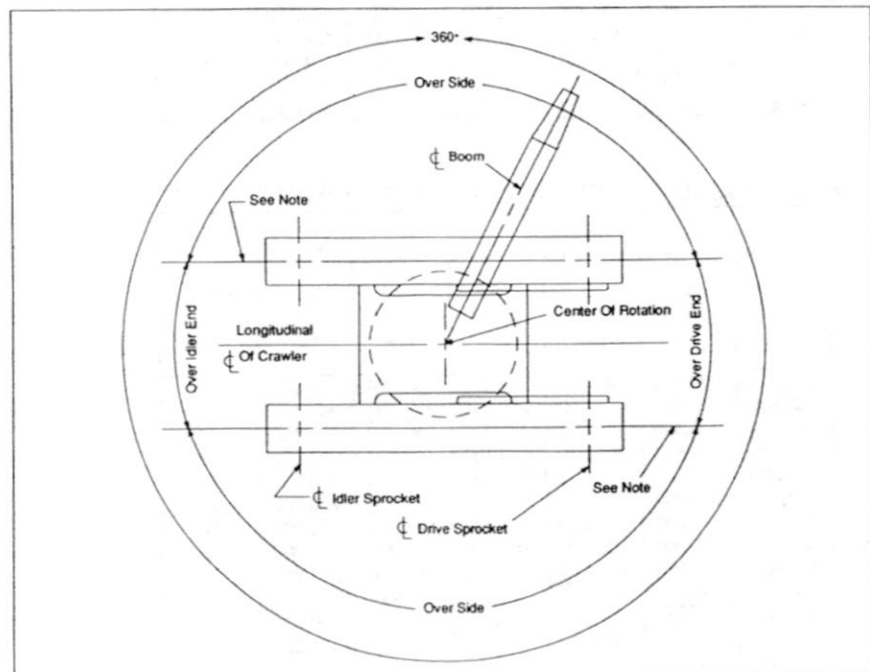

LS-248H II Lift Crane Capacities

35 FT. (10.67 m) TUBE BOOM - HAMMERHEAD TOP SECTION

Load Radius (ft)	Boom Angle (deg)	360° Rotation					Over End Blocked	Load Radius (ft)
		ABC+A CTWT (lb)	ABC CTWT (lb)	AB CTWT (lb)	A CTWT (lb)	0 CTWT (lb)	ABC+A CTWT (lb)	
10	82.0	400,000					400,000	10
11	80.8	375,000					375,000	11
12	79.0	350,000					350,000	12
13	77.2	345,000					345,000	13
14	75.4	336,100					336,100	14
15	73.5	315,000					315,000	15
16	71.6	296,300					296,300	16
17	69.7	279,700					279,700	17
18	67.8	264,800					264,800	18
19	65.8	251,300					251,300	19
20	63.8	239,100					239,100	20
25	53.1	192,000					192,000	25
30	40.1	140,100					140,100	30
35	19.9	72,700					72,700	35

50 FT. (15.24 m) TUBE BOOM - OPEN THROAT TOP SECTION

Load Radius (ft)	Boom Angle (deg)	360° Rotation					Over End Blocked	Load Radius (ft)
		ABC+A CTWT (lb)	ABC CTWT (lb)	AB CTWT (lb)	A CTWT (lb)	0 CTWT (lb)	ABC+A CTWT (lb)	
12	80.0	350,000	350,000	350,000	319,600	300,300	350,000	12
13	78.8	350,000	350,000	336,700	297,000	279,000	350,000	13
14	77.6	337,100	337,100	314,500	277,300	254,100	337,100	14
15	76.4	316,200	316,200	295,000	260,000	204,700	316,200	15
16	75.3	297,700	297,700	277,700	239,800	171,100	297,700	16
17	74.1	281,200	281,200	262,300	206,000	146,800	281,200	17
18	72.9	266,400	266,400	248,400	180,400	128,300	266,400	18
19	71.7	253,000	253,000	235,900	160,300	113,900	253,000	19
20	70.5	240,900	240,900	224,600	144,100	102,200	240,900	20
25	64.3	194,100	191,500	154,500	95,100	66,900	194,100	25
30	57.7	154,800	142,900	114,900	70,200	49,000	154,800	30
35	50.6	127,300	113,400	91,000	55,100	38,100	127,800	35
40	42.7	105,300	93,700	75,000	45,000	30,800	108,000	40
50	20.9	70,200	68,800	54,700	32,200	21,500	70,200	50

60 FT. (18.29 m) TUBE BOOM - OPEN THROAT TOP SECTION

Load Radius (ft)	Boom Angle (deg)	360° Rotation					Over End Blocked	Load Radius (ft)
		ABC+A CTWT (lb)	ABC CTWT (lb)	AB CTWT (lb)	A CTWT (lb)	0 CTWT (lb)	ABC+A CTWT (lb)	
12	81.6	308,300	308,300	308,300	308,300	299,800	308,300	12
13	80.7	302,300	302,300	302,300	296,500	278,700	302,300	13
14	79.7	296,500	296,500	296,500	277,000	256,300	296,400	14
15	78.7	289,500	289,500	289,500	259,800	206,500	289,600	15
16	77.8	284,200	284,200	277,400	241,300	172,600	284,200	16
17	76.8	279,200	279,200	262,100	207,300	148,100	279,200	17
18	75.8	266,200	266,200	248,300	181,600	129,500	266,200	18
19	74.8	252,900	252,900	235,800	161,400	114,900	252,900	19
20	73.8	240,800	240,800	224,500	145,100	103,200	240,800	20
25	68.8	188,100	188,100	155,200	95,800	67,600	188,100	25
30	63.6	150,500	143,400	115,500	70,800	49,600	150,500	30
35	58.1	124,800	113,900	91,500	55,700	38,700	124,900	35
40	52.3	105,800	94,200	75,500	45,500	31,300	106,300	40
50	38.9	78,000	69,300	55,200	32,700	22,100	79,900	50
60	19.0	58,400	54,200	42,900	24,900	16,400	58,400	60

70 FT. (21.34 m) TUBE BOOM - OPEN THROAT TOP SECTION								
Load Radius (ft)	Boom Angle (deg)	360° Rotation					Over End Blocked	Load Radius (ft)
		ABC+A CTWT (lb)	ABC CTWT (lb)	AB CTWT (lb)	A CTWT (lb)	0 CTWT (lb)		
13	82.0	286,600	286,000	286,600	286,600	278,700	286,600	13
14	81.2	281,800	281,800	281,800	277,400	261,200	281,800	14
15	80.4	277,000	277,000	277,000	260,200	210,500	277,000	15
16	79.5	272,500	272,500	272,500	244,700	176,000	272,500	16
17	78.7	268,100	268,100	262,500	210,200	151,000	268,100	17
18	77.9	262,400	262,400	248,700	184,100	132,100	262,400	18
19	77.0	253,300	253,300	236,300	163,700	117,200	253,300	19
20	76.2	241,300	241,300	225,000	147,200	105,300	241,300	20
25	71.9	194,600	193,700	156,600	97,200	69,100	194,600	25
30	67.6	161,900	144,600	116,700	71,900	50,700	162,700	30
35	63.1	128,800	114,900	92,500	56,600	39,600	137,100	35
40	58.4	106,600	95,000	76,300	46,300	32,100	117,600	40
50	48.1	78,700	70,000	55,900	33,400	22,700	89,200	50
60	35.9	61,800	54,800	43,600	25,500	17,000	71,300	60
70	17.6	50,400	44,600	35,200	20,200	13,000	57,800	70

80 FT. (24.38 m) TUBE BOOM - OPEN THROAT TOP SECTION								
Load Radius (ft)	Boom Angle (deg)	360° Rotation					Over End Blocked	Load Radius (ft)
		ABC+A CTWT (lb)	ABC CTWT (lb)	AB CTWT (lb)	A CTWT (lb)	0 CTWT (lb)		
14.4	82.0	260,100	260,100	260,100	260,100	238,700	260,100	14.4
15	81.6	257,700	257,700	257,700	257,700	211,400	257,700	15
16	80.9	253,500	253,500	253,500	244,500	176,800	253,500	16
17	80.1	249,600	249,600	249,600	210,900	151,700	249,600	17
18	79.4	245,700	245,700	245,700	184,700	132,700	245,600	18
19	78.7	241,900	241,900	235,800	164,200	117,800	241,900	19
20	77.9	238,300	238,300	224,600	147,700	105,800	238,300	20
25	74.2	194,300	194,000	156,900	97,500	69,300	194,300	25
30	70.5	162,100	144,800	116,800	72,100	50,900	162,400	30
35	66.6	128,900	115,000	92,600	56,700	39,700	135,700	35
40	62.7	106,700	95,100	76,400	46,500	32,300	116,500	40
50	54.3	78,800	70,100	56,000	33,500	22,800	88,600	50
60	44.8	61,900	54,900	43,700	25,700	17,100	71,400	60
70	33.5	50,600	44,800	35,400	20,400	13,200	59,000	70
80	16.5	42,400	37,400	29,400	16,500	10,400	48,400	80

90 FT. (27.43 m) TUBE BOOM - OPEN THROAT TOP SECTION								
Load Radius (ft)	Boom Angle (deg)	360° Rotation					Over End Blocked	Load Radius (ft)
		ABC+A CTWT (lb)	ABC CTWT (lb)	AB CTWT (lb)	A CTWT (lb)	0 CTWT (lb)		
15.8	82.0	239,200	239,200	239,200	239,200	183,300	239,200	15.8
16	81.9	238,500	238,500	238,500	238,500	177,400	238,500	16
17	81.2	233,500	233,500	233,500	211,400	152,200	233,500	17
18	80.6	230,000	230,000	230,000	185,200	133,100	230,000	18
19	79.9	226,600	226,600	226,600	164,600	118,100	226,600	19
20	79.3	223,400	223,400	223,400	148,000	106,100	223,300	20
25	76.0	193,900	193,900	157,100	97,700	69,500	193,900	25
30	72.7	160,800	144,900	116,900	72,200	51,000	160,900	30
35	69.4	129,000	115,100	92,700	56,800	39,800	134,300	35
40	65.9	106,700	95,100	76,400	46,500	32,300	115,500	40
50	58.7	78,800	70,100	56,000	33,500	22,800	88,400	50
60	50.9	61,900	54,900	43,700	25,700	17,100	71,000	60
70	42.2	50,600	44,800	35,400	20,400	13,300	59,000	70
80	31.5	42,500	37,500	29,500	16,600	10,500	49,400	80
90	15.5	36,300	31,900	24,900	13,600	8,300	41,300	90