

8019 Towhee Road
Parker, CO 80134

HC-228H Jib Capacities (U.S. units)

Boom - tubular:
70" wide, 62" deep with open throat top section, 1-3/8" pendants and boom live mast.

Jib - tubular; 36" wide, 30" deep.
Mounting - rubber tire mobile base: Link-Belt; 8 x 4 drive, 260" wheelbase, 11' 0" wide.

Counterweights:
Ctwt. "A" upper - 23,000 lbs.
Ctwt. "AB" upper - 42,330 lbs.
Ctwt. "A" bumper - 13,500 lbs.

Length	Radius	Capacities on outriggers - 360° swing														
		30' jib			40' jib			50' jib			60' jib			70' jib		
	jib angles to boom (jib offset degrees)															
	feet	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°
50'	17	30,000*	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
	18	29,800*	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
	19	29,600*	-----	-----	26,700*	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
	20	29,400*	-----	-----	26,500*	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
	25	28,300*	26,400*	-----	25,600*	-----	-----	23,300*	-----	-----	21,200*	-----	-----	18,800*	-----	-----
	30	27,200*	25,400*	-----	24,700*	23,300*	-----	22,500*	-----	-----	20,500*	-----	-----	18,100*	-----	-----
	35	26,100*	24,300*	21,300*	23,800*	21,800*	-----	21,700*	20,400*	-----	19,800*	-----	-----	17,500*	-----	-----
	40	25,000*	23,300*	19,700*	22,700*	20,300*	17,000*	20,900*	18,800*	-----	19,100*	18,000*	-----	16,800*	-----	-----
	50	22,800*	20,500*	17,000*	19,500*	17,100*	14,500*	17,900*	15,300*	12,000*	17,100*	14,600*	-----	15,400*	14,200*	-----
	60	19,400*	16,700*	15,200*	16,300*	14,500*	12,000*	14,200*	12,000*	10,200*	13,500*	11,000*	8,400*	13,300*	11,700*	9,200*
	70	15,800*	15,300*	-----	13,500*	11,800*	10,900*	11,400*	10,100*	8,400*	9,700*	8,400*	7,100*	10,700*	9,000*	7,300*
80	-----	-----	-----	11,300*	10,600*	-----	9,300*	8,300*	7,500*	7,800*	7,000*	5,800*	7,900*	7,200*	6,000*	
90	-----	-----	-----	-----	-----	-----	7,800*	7,200*	-----	6,300*	5,800*	5,300*	6,600*	5,900*	4,800*	
100	-----	-----	-----	-----	-----	-----	-----	-----	-----	5,400*	5,100*	-----	5,100*	4,700*	4,300*	
110	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4,400*	4,100*	-----	
70'	25	29,200*	-----	-----	26,300*	-----	-----	23,900*	-----	-----	-----	-----	-----	-----	-----	-----
	30	28,400*	26,200*	-----	25,600*	-----	-----	23,300*	-----	-----	21,100*	-----	-----	18,600*	-----	-----
	35	27,500*	25,400*	22,400*	24,900*	23,000*	-----	22,600*	-----	-----	20,500*	-----	-----	18,100*	-----	-----
	40	26,700*	24,500*	20,900*	24,200*	21,800*	-----	21,900*	20,100*	-----	19,900*	-----	-----	17,500*	-----	-----
	50	24,900*	22,800*	18,500*	22,300*	19,300*	15,800*	20,600*	17,300*	13,100*	18,700*	16,400*	-----	16,300*	15,100*	-----
	60	23,100*	20,600*	16,700*	19,700*	16,600*	13,900*	17,700*	14,400*	11,300*	16,700*	13,400*	9,100*	15,200*	13,100*	-----
	70	20,800*	17,600*	15,300*	16,900*	14,600*	11,900*	14,700*	11,800*	9,800*	13,600*	10,400*	8,000*	13,200*	11,000*	7,900*
	80	17,500*	15,700*	14,200*	14,700*	12,500*	11,100*	11,900*	10,300*	8,400*	10,500*	8,400*	6,800*	11,000*	8,700*	6,900*
	90	15,500*	15,000*	-----	12,200*	11,200*	-----	10,200*	8,600*	7,700*	8,300*	7,200*	5,800*	8,600*	7,300*	5,800*
	100	-----	-----	-----	11,000*	-----	-----	8,500*	7,800*	-----	7,100*	5,900*	5,400*	7,100*	6,100*	4,900*
	110	-----	-----	-----	-----	-----	-----	7,500*	-----	-----	5,800*	5,500*	-----	6,000*	4,900*	4,400*
120	-----	-----	-----	-----	-----	-----	-----	-----	-----	5,300*	-----	-----	4,800*	4,500*	-----	
130	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4,300*	-----	-----	
90'	25	29,900*	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
	30	29,200*	-----	-----	26,200*	-----	-----	23,800*	-----	-----	21,500*	-----	-----	-----	-----	-----
	35	28,400*	26,000*	-----	25,600*	-----	-----	23,200*	-----	-----	21,000*	-----	-----	18,500*	-----	-----
	40	27,700*	25,400*	21,800*	25,000*	22,800*	-----	22,600*	20,800*	-----	20,500*	-----	-----	18,000*	-----	-----
	50	26,300*	24,000*	19,600*	23,800*	20,700*	16,600*	21,500*	18,700*	-----	19,400*	17,600*	-----	17,000*	15,500*	-----
	60	24,800*	22,600*	17,800*	22,000*	18,600*	15,100*	20,100*	16,300*	12,000*	18,400*	15,100*	10,300*	16,000*	14,200*	-----
	70	23,300*	20,600*	16,400*	19,800*	16,500*	13,400*	17,600*	13,800*	10,800*	16,300*	12,600*	8,500*	15,000*	12,300*	8,800*
	80	21,700*	18,200*	15,300*	17,400*	14,800*	11,900*	15,000*	11,800*	9,500*	13,700*	9,900*	7,600*	13,100*	10,400*	7,500*
	90	19,000*	15,900*	14,400*	15,400*	13,000*	11,200*	12,300*	10,500*	8,400*	11,000*	8,400*	6,700*	11,200*	8,500*	6,600*
	100	16,000*	15,400*	-----	13,500*	11,600*	10,400*	10,900*	9,100*	7,800*	8,700*	7,400*	5,800*	9,100*	7,300*	5,700*
	110	15,000	-----	-----	11,700*	10,800*	-----	9,400*	8,100*	7,100*	7,600*	6,300*	5,800*	7,500*	6,300*	4,900*
120	-----	-----	-----	10,700*	-----	-----	8,200*	7,400*	-----	6,500*	5,700*	5,100*	6,500*	5,300*	4,500*	
130	-----	-----	-----	-----	-----	-----	7,300*	-----	-----	5,700*	5,200*	-----	5,400*	4,700*	4,100*	
140	-----	-----	-----	-----	-----	-----	-----	-----	-----	5,100*	-----	-----	4,700*	4,300*	-----	
150	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4,200*	-----	-----	
110'	30	29,700*	-----	-----	26,600*	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
	35	29,100*	26,500*	-----	26,100*	-----	-----	23,700*	-----	-----	21,400*	-----	-----	18,900*	-----	-----
	40	28,500*	25,900*	-----	25,600*	-----	-----	23,200*	-----	-----	21,000*	-----	-----	18,400*	-----	-----
	50	27,300*	24,800*	20,400*	24,500*	21,800*	17,100*	22,200*	19,800*	-----	20,000*	18,200*	-----	17,500*	-----	-----
	60	26,000*	23,600*	18,800*	23,500*	20,000*	15,700*	21,200*	17,700*	12,600*	19,100*	16,400*	-----	16,700*	15,000*	-----
	70	24,800*	22,400*	17,400*	21,700*	18,100*	14,500*	19,700*	15,600*	11,500*	18,100*	14,200*	8,900*	15,800*	13,400*	9,500*
	80	23,500	20,700*	16,300*	19,800*	16,300*	13,100*	17,500*	13,300*	10,400*	16,100*	11,900*	8,200*	14,700*	11,700*	7,900*
	90	19,800	18,600*	15,300*	17,800*	14,900*	11,800*	15,200*	11,700*	9,300*	13,800*	9,600*	7,400*	13,100*	10,000*	7,200*
	100	16,900	16,400*	14,600*	16,000*	13,300*	11,300*	12,800*	10,600*	8,400*	11,400*	8,300*	6,500*	11,300*	8,300*	6,400*
	110	14,500	14,800	-----	14,300*	11,900*	10,600*	11,400*	9,400*	7,900*	8,900*	7,500*	5,800*	9,500*	7,300*	5,600*
	120	12,600	12,800	-----	12,500*	11,200*	-----	10,100*	8,400*	7,300*	8,000*	6,600*	5,500*	7,800*	6,500*	4,900*
130	11,000	-----	-----	11,200	10,400*	-----	8,700*	7,800*	-----	7,100*	5,800*	5,200*	6,900*	5,600*	4,600*	
140	-----	-----	-----	9,800	-----	-----	7,900*	7,100*	-----	6,000*	5,500*	-----	6,000*	4,900*	4,200*	
150	-----	-----	-----	-----	-----	-----	7,100*	-----	-----	5,500*	5,000*	-----	5,000*	4,500*	-----	
160	-----	-----	-----	-----	-----	-----	-----	-----	-----	5,000*	-----	-----	4,600*	4,100*	-----	
170	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4,100*	-----	-----	

Caution: This material is for reference only. Operator must refer to in-cab capacity plate to determine allowable machine lifting capacities and operating procedures.

HC-228H Jib Capacities (U.S. units) con't

Boom - tubular:
70" wide, 62" deep with open throat top section, 1-3/8" pendants and boom live mast.

Jib - tubular; 36" wide, 30" deep.
Mounting - rubber tire
mobile base: Link-Belt; 8 x 4 drive, 260" wheelbase, 11' 0" wide.

Counterweights:
Cwt. "A" upper - 23,000 lbs.
Cwt. "AB" upper - 42,330 lbs.
Cwt. "A" bumper - 13,500 lbs.

Length	Radius	Capacities on outriggers - 360° swing																
		30' jib			40' jib			50' jib			60' jib			70' jib				
		jib angles to boom (jib offset degrees)																
feet	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°			
130'	35	29,600*	-----	-----	26,500*	-----	-----	24,000*	-----	-----	-----	-----	-----	-----	-----	-----		
	40	29,100*	26,400*	-----	26,100*	-----	-----	23,600*	-----	-----	-----	-----	21,300*	-----	-----	18,700*		
	50	28,000*	25,400*	21,100*	25,100*	22,600*	-----	22,700*	-----	-----	20,600*	-----	20,500*	-----	-----	18,000*		
	60	26,900*	24,300*	19,500*	24,200*	21,000*	16,200*	21,800*	18,700*	13,500*	19,700*	17,300*	-----	17,200*	15,300*	-----		
	70	25,800*	23,300*	18,200*	23,200*	19,400*	15,100*	20,900*	16,900*	12,000*	18,800*	15,400*	9,900*	18,800*	15,400*	16,400*	14,200*	
	80	22,900	22,200*	17,100*	21,600*	17,700*	14,100*	19,400*	15,000*	11,100*	17,400*	13,400*	8,600*	17,400*	13,400*	15,500*	12,700*	8,700*
	90	19,300	19,800	16,200*	19,500	16,200*	12,900*	17,400*	13,000*	10,100*	15,900*	11,400*	7,900*	14,100*	11,300*	9,700*	7,600*	
	100	16,400	16,800	15,400*	16,500	14,900*	11,800*	15,400*	11,700*	9,200*	13,800*	9,300*	7,200*	12,900*	9,700*	11,300*	6,900*	
	110	14,000	14,300	14,600	14,200	13,600*	11,300*	13,300*	10,700*	8,400*	11,700*	8,300*	6,400*	11,500*	8,200*	11,500*	8,200*	6,200*
	120	12,100	12,300	12,500	12,300	12,200*	10,800*	11,700*	9,700*	7,900*	9,500*	7,800*	5,800*	9,800*	7,300*	7,300*	5,500*	
	130	10,500	10,700	-----	10,600	11,000	-----	10,700*	8,600*	7,400*	8,300*	6,800*	5,600*	8,200*	6,600*	6,600*	4,900*	
	140	9,100	9,300	-----	9,300	9,500	-----	9,400	8,000*	-----	7,500*	5,900*	5,300*	7,300*	5,800*	5,800*	4,600*	
	150	7,900	-----	-----	8,100	-----	-----	8,300	7,500*	-----	6,600*	5,600*	-----	6,500*	5,000*	5,000*	4,300*	
160	-----	-----	-----	7,100	-----	-----	7,200	-----	-----	5,800*	5,300*	-----	5,600*	4,700*	4,700*	4,000*		
170	-----	-----	-----	-----	-----	-----	6,400	-----	-----	5,400*	-----	-----	4,800*	4,300*	-----	-----		
180	-----	-----	-----	-----	-----	-----	-----	-----	-----	5,000*	-----	-----	4,500*	-----	-----	-----		
190	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4,000*	-----	-----	-----		
150'	35	29,900*	-----	-----	26,400*	-----	-----	23,900*	-----	-----	-----	-----	21,600*	-----	-----	-----		
	40	29,500*	-----	-----	26,000*	-----	-----	23,500*	-----	-----	-----	-----	21,200*	-----	-----	-----		
	50	28,500*	25,800*	21,700*	25,600*	23,200*	-----	23,100*	-----	-----	-----	-----	20,900*	-----	-----	18,300*		
	60	27,600*	24,900*	20,200*	24,800*	21,800*	16,700*	22,300*	19,600*	-----	-----	-----	20,100*	18,000*	-----	17,600*	15,600*	
	70	26,600*	24,000*	18,900*	23,900*	20,400*	15,600*	21,500*	17,900*	12,400*	19,300*	16,400*	10,600*	16,900*	14,800*	16,900*	14,800*	
	80	22,400	23,000	17,800*	22,500	18,900*	14,700*	20,200*	16,200*	11,800*	17,900*	14,600*	8,900*	16,000*	13,500*	13,500*	9,200*	
	90	18,800	19,300	16,900*	18,900	17,400*	13,800*	18,600*	14,500*	10,700*	16,300*	12,800*	8,300*	14,500*	12,200*	12,200*	7,900*	
	100	15,800	16,300	16,100*	16,000	16,100*	12,700*	16,100	12,700*	9,900*	15,000*	11,000*	7,700*	13,200*	10,900*	10,900*	7,300*	
	110	13,400	13,800	14,200	13,600	14,100	11,800*	13,800	11,700*	9,000*	13,800*	9,100*	7,000*	12,100*	9,500*	9,500*	6,700*	
	120	11,500	11,800	12,100	11,700	12,100	11,400*	11,800	10,800*	8,400*	11,900	8,300*	6,300*	11,100*	8,000*	8,000*	6,100*	
	130	9,900	10,200	10,400	10,100	10,500	10,800	10,200	9,900*	8,000*	9,900*	7,700*	5,800*	10,100*	7,400*	7,400*	5,400*	
	140	8,500	8,800	-----	8,700	9,000	9,300	8,800	8,900*	7,500*	8,600*	7,000*	5,600*	8,600*	6,700*	6,700*	4,900*	
	150	7,400	7,600	-----	7,500	7,800	-----	7,700	8,000	7,100*	7,800	6,200*	5,300*	7,500*	6,000*	6,000*	4,600*	
160	6,300	-----	-----	6,500	6,700	-----	6,700	7,000	-----	6,800	5,800*	5,100*	6,800*	5,300*	5,300*	4,400*		
170	5,500	-----	-----	5,600	-----	-----	5,800	6,000	-----	5,900	5,500*	-----	6,000	4,800*	4,800*	4,100*		
180	-----	-----	-----	-----	-----	-----	5,000	-----	-----	5,100	5,200*	-----	5,200	4,500*	-----	-----		
190	-----	-----	-----	-----	-----	-----	-----	-----	-----	4,400	-----	-----	4,500	4,200*	-----	-----		
200	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	3,900	-----	-----	-----		
170'	40	29,800*	-----	-----	26,700*	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----		
	50	29,000*	26,200*	-----	26,000*	23,500*	-----	23,400*	-----	-----	-----	-----	21,200*	-----	-----	18,600*		
	60	28,100*	25,400*	20,700*	25,200*	22,400*	17,100*	22,700*	20,200*	-----	-----	-----	20,500*	18,300*	-----	17,900*		
	70	26,900*	24,500*	19,500*	24,400*	21,100*	16,000*	22,000*	18,700*	13,100*	19,800*	17,200*	-----	17,300*	15,200*	-----		
	80	22,000	22,500	18,400*	22,200	19,800*	15,200*	20,500*	17,200*	12,000*	18,100*	15,600*	9,600*	16,200*	14,200*	9,500*		
	90	18,200	18,800	17,500*	18,400	18,500*	14,400*	18,500	15,700*	11,200*	16,600*	14,000*	8,600*	14,800*	13,000*	8,500*		
	100	15,200	15,800	16,200	15,400	16,100	13,600*	15,600	14,100*	10,500*	15,300*	12,300*	8,100*	13,500*	11,800*	7,700*		
	110	12,900	13,300	13,700	13,000	13,600	12,600*	13,200	12,500*	9,700*	13,300	10,600*	7,500*	12,400*	10,500*	7,100*		
	120	10,900	11,300	11,600	11,100	11,600	11,800*	11,200	11,600*	8,900*	11,300	8,900*	6,900*	11,400*	9,300*	6,600*		
	130	9,300	9,700	9,900	9,500	9,900	10,300	9,600	10,200	8,400*	9,700	8,300*	6,300*	9,800	7,900*	6,000*		
	140	8,000	8,300	8,500	8,100	8,500	8,800	8,300	8,800	8,000*	8,400	7,700*	5,800*	8,400	7,400*	5,400*		
	150	6,800	7,000	-----	6,900	7,300	7,600	7,100	7,500	7,600*	7,200	7,100*	5,600*	7,300	6,800*	4,900*		
	160	5,800	6,000	-----	5,900	6,200	-----	6,100	6,500	6,700	6,200	6,400*	5,400*	6,200	6,100*	4,600*		
170	4,900	5,100	-----	5,000	5,300	-----	5,200	5,500	-----	5,300	5,700	5,100*	5,400	5,500*	4,000*			
180	4,100	-----	-----	4,300	4,500	-----	4,400	4,700	-----	4,500	4,900	-----	4,600	4,900*	3,600*			
190	-----	-----	-----	3,600	-----	-----	3,700	3,900	-----	3,800	4,100	-----	3,900	4,300	-----			
200	-----	-----	-----	-----	-----	-----	3,100	-----	-----	3,200	3,400	-----	3,300	3,600	-----			
210	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,600	-----	-----	2,700	3,000	-----			
220	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,200	-----	-----			

HC-228H Jib Capacities (U.S. units) con't


Length	Radius	Capacities on outriggers - 360° swing														
		30' jib			40' jib			50' jib			60' jib			70' jib		
		jib angles to boom (jib offset degrees)														
		feet	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°
190'	50	29,300*	26,500*	-----	26,300*	-----	-----	23,700*	-----	-----	21,400*	-----	-----	18,800*	-----	-----
	60	28,600*	25,700*	21,200*	25,600*	22,900*	-----	23,100*	20,700*	-----	20,800*	-----	-----	18,200*	-----	-----
	70	26,300	25,000*	20,000*	24,900*	21,800*	16,400*	22,400*	19,400*	13,600*	19,800*	17,400*	-----	17,600*	15,400*	-----
	80	21,500	22,300	19,000*	21,700	20,600*	15,600*	20,500*	18,100*	12,300*	18,200*	16,100*	10,200*	16,300*	14,300*	-----
	90	17,700	18,300	18,100*	17,800	18,700	14,800*	18,000	16,700*	11,600*	16,700*	14,900*	8,900*	14,900*	13,200*	9,100*
	100	14,700	15,300	15,800	14,800	15,600	14,100*	15,000	15,200*	11,000*	15,100	13,400*	8,400*	13,600*	12,200*	7,900*
	110	12,300	12,800	13,200	12,500	13,100	13,400*	12,600	13,400	10,300*	12,700	11,900*	7,900*	12,500*	11,300*	7,400*
	120	10,400	10,800	11,200	10,500	11,100	11,600	10,600	11,400	9,600*	10,800	10,300*	7,300*	10,800	10,200*	6,800*
	130	8,700	9,100	9,400	8,900	9,400	9,900	9,000	9,700	8,800*	9,100	8,900*	6,800*	9,200	9,100*	6,000*
	140	7,400	7,700	8,000	7,500	8,000	8,400	7,700	8,200	8,000*	7,800	8,300*	6,200*	7,800	7,900*	5,300*
	150	6,200	6,500	6,700	6,400	6,800	7,100	6,500	7,000	7,200*	6,600	7,200*	5,700*	6,700	7,400*	4,600*
	160	5,200	5,400	5,600	5,300	5,700	6,000	5,500	5,900	6,300	5,600	6,100	5,100*	5,600	6,300	4,000*
	170	4,300	4,500	-----	4,400	4,800	5,000	4,600	5,000	5,300	4,700	5,200	4,600*	4,700	5,300	3,600*
180	3,500	3,700	-----	3,700	3,900	-----	3,800	4,100	-----	3,900	4,300	4,000*	4,000	4,500	3,300*	
190	2,800	3,000	-----	3,000	3,200	-----	3,100	3,400	-----	3,200	3,600	3,700*	3,300	3,700	2,900*	
200	2,200	-----	-----	2,300	-----	-----	2,500	2,700	-----	2,600	2,900	-----	2,600	3,100	2,700*	
210	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,000	2,300	-----	2,100	2,400	-----	
210'	50	29,600*	-----	-----	26,500*	-----	-----	24,000*	-----	-----	21,600*	-----	-----	-----	-----	-----
	60	28,900*	26,000*	21,600*	25,900*	23,300*	-----	23,400*	-----	-----	21,100*	-----	-----	18,500*	-----	-----
	70	25,800	25,300*	20,500*	25,300*	22,300*	16,700*	22,700*	19,500*	-----	19,600*	17,200*	-----	17,700*	15,400*	-----
	80	20,900	21,800	19,500*	21,100	21,000*	15,900*	20,200*	18,200*	12,800*	18,000*	16,000*	10,800*	16,200*	14,200*	-----
	90	17,100	17,900	18,500	17,300	18,300	15,200*	17,400	17,000*	12,000*	16,500*	14,800*	9,400*	14,800*	13,100*	9,300*
	100	14,100	14,800	15,300	14,300	15,100	14,100*	14,400	15,500	11,400*	14,500	13,800*	8,600*	13,500*	12,100*	8,200*
	110	11,700	12,300	12,800	11,900	12,600	12,400*	12,000	12,900	10,200*	12,100	12,400*	8,200*	12,200	10,900*	7,100*
	120	9,800	10,300	10,700	9,900	10,600	11,000*	10,100	10,900	9,000*	10,200	11,000*	7,400*	10,200	9,700*	6,200*
	130	8,200	8,600	9,000	8,300	8,900	9,400	8,400	9,200	7,900*	8,500	9,400	6,500*	8,600	8,500*	5,400*
	140	6,800	7,200	7,500	6,900	7,500	7,900	7,100	7,700	7,100*	7,200	7,900	5,700*	7,200	7,600*	4,700*
	150	5,600	6,000	6,200	5,800	6,200	6,600	5,900	6,500	6,300*	6,000	6,700	5,000*	6,100	6,800*	4,100*
	160	4,600	4,900	5,100	4,700	5,200	5,500	4,900	5,400	5,600*	5,000	5,600	4,500*	5,000	5,800	3,700*
	170	3,700	4,000	4,200	3,800	4,200	4,500	4,000	4,400	4,800	4,100	4,600	4,000*	4,100	4,800	3,200*
180	2,900	3,100	-----	3,100	3,400	3,600	3,200	3,600	3,900	3,300	3,800	3,600*	3,300	4,000	2,900*	
190	2,200	2,400	-----	2,400	2,600	-----	2,500	2,800	3,100	2,600	3,000	3,300*	2,600	3,200	2,600*	
200	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	2,000	2,500	2,300*	

Jib Capacity

Notes:

1. Capacities are shown in pounds and are the maximum allowable. Capacities are based on machine standing level on firm supporting surface under ideal job conditions. Capacities are not more than 85% of the tipping loads unless marked with an asterisk (*).
 - a. Asterisk indicates capacities are based on factors other than those which would cause a tipping condition.
2. Capacities are for 360° swing on five outrigger jacks.
3. Capacities are limited to a Link-Belt 62" x 70" open throat tubular boom, live mast and a Link-Belt 15 ton, 30" x 36" cross section jib with a 12' 7-5/8" high jib strut properly assembled.
4. Do not swing over side until all four outrigger beams are fully extended, all five jacks are extended, until all tires are clear of the ground and machine is properly leveled on a firm supporting surface.
5. Two parts of 7/8" diameter type "N" or "RB" wire rope is required for maximum lift.
6. Capacities are for 30', 40', 50', 60' and 70' jib lengths only.
7. A jib cannot be used on the open throat boom that is longer than 210'.
8. The least stable condition is over the side.
9. A deduction must be made from the jib capacities for weight of hook block, hook, sling, grapple, load weighing devices, etc.
10. When using main hook, while jib is attached, reduce boom capacities by the following values:
 - a. 30' jib - 2,200 lbs.
 - b. 40' jib - 2,500 lbs.
 - c. 50' jib - 2,900 lbs.
 - d. 60' jib - 3,200 lbs.
 - e. 70' jib - 3,500 lbs.
11. Refer to all notes on applicable lifting crane capacity chart in addition to these notes.
12. Capacities apply only to the machine as originally manufactured and normally equipped by Link-Belt Construction Equipment Company.

Working Range

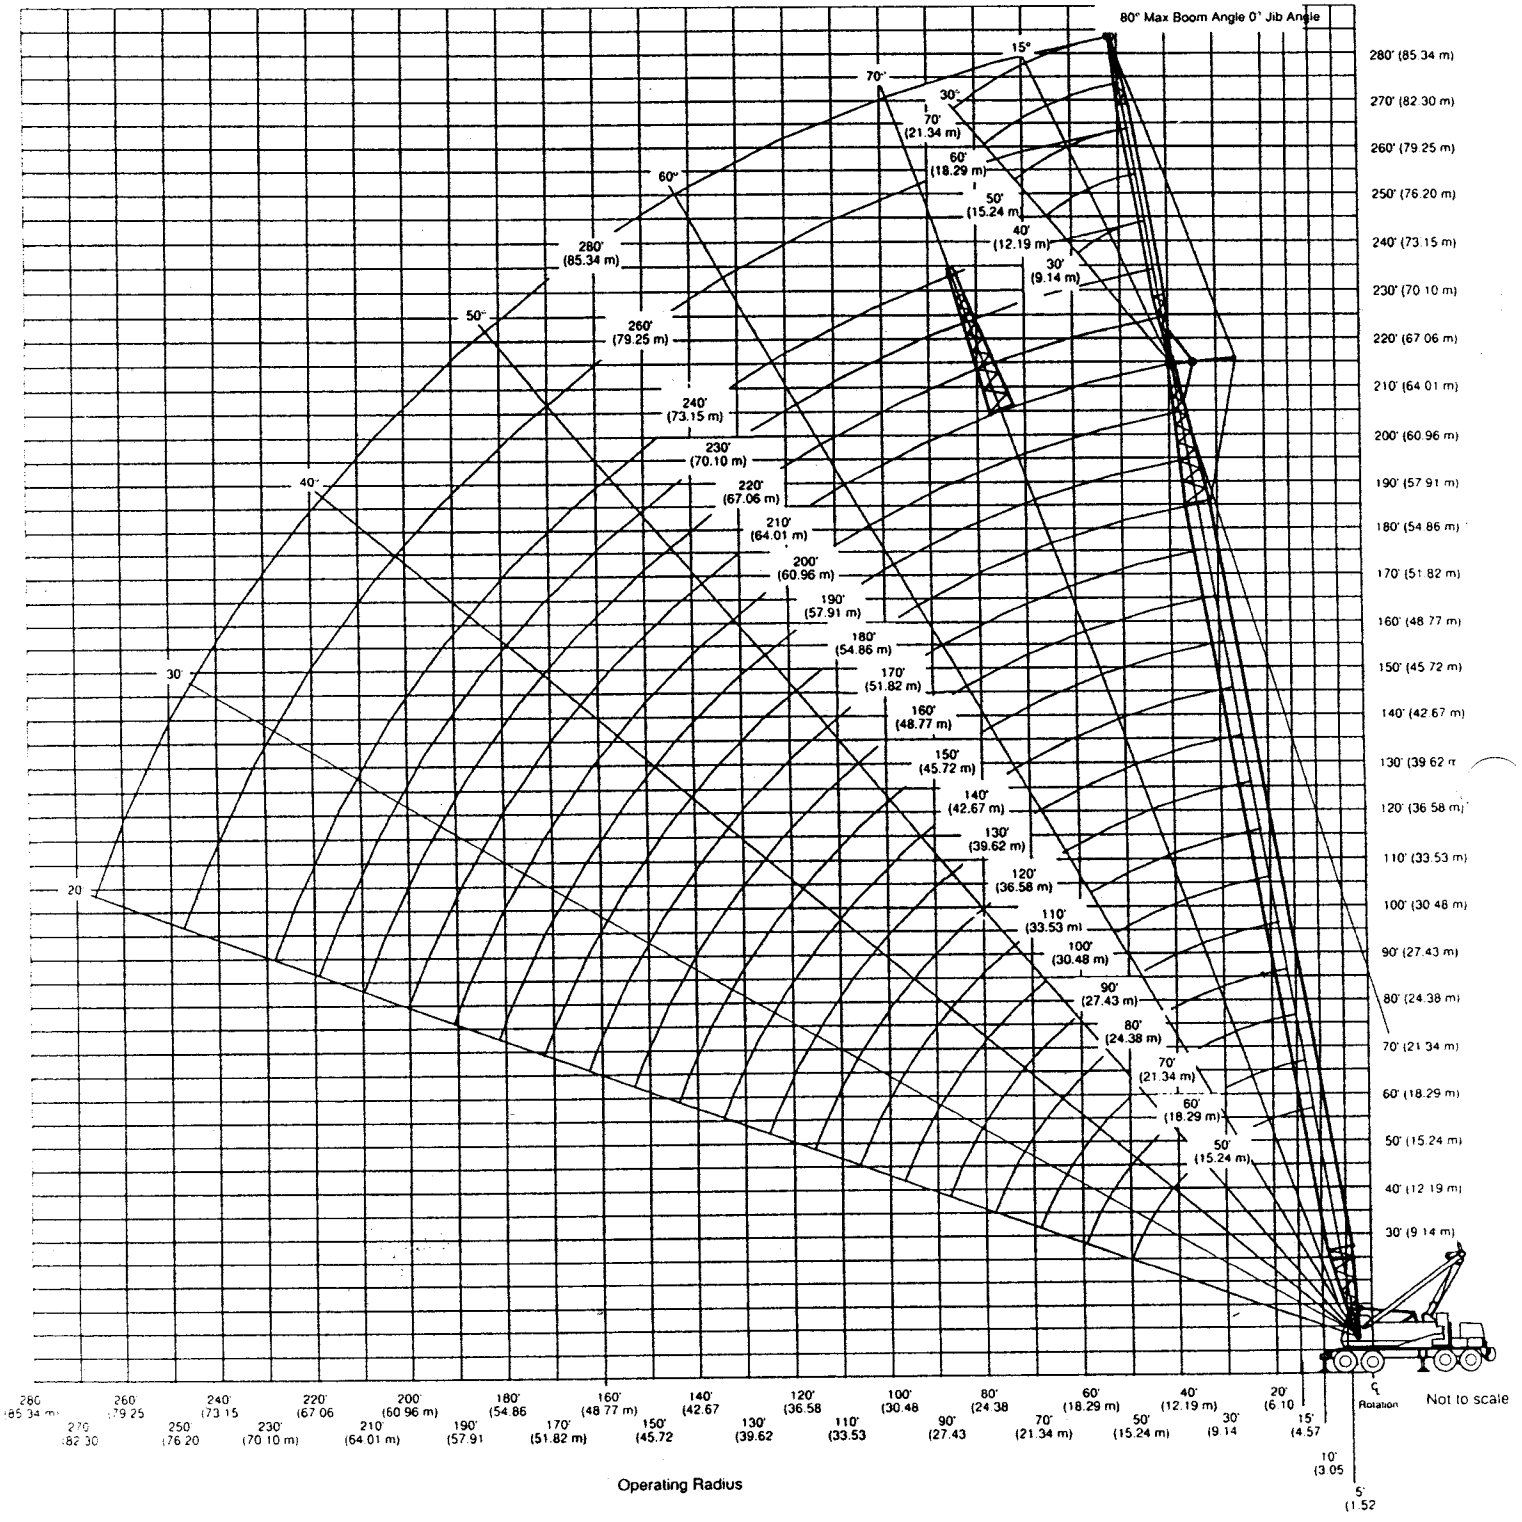

ink-Belt Construction Equipment Company Lexington, Kentucky

We are constantly improving our products and therefore reserve the right to change designs and specifications.

ink-Belt is a registered trademark. Copyright 1991. All rights reserved.

A unit of Sumitomo Construction Machinery Co., Ltd.

Gibbons Erectors, Inc.

8019 Towhee Road
Parker, CO 80134